USER'S MANUAL
version 1.1

English

WST-8800 WIRELESS SIMPLEX WALL SWITCH

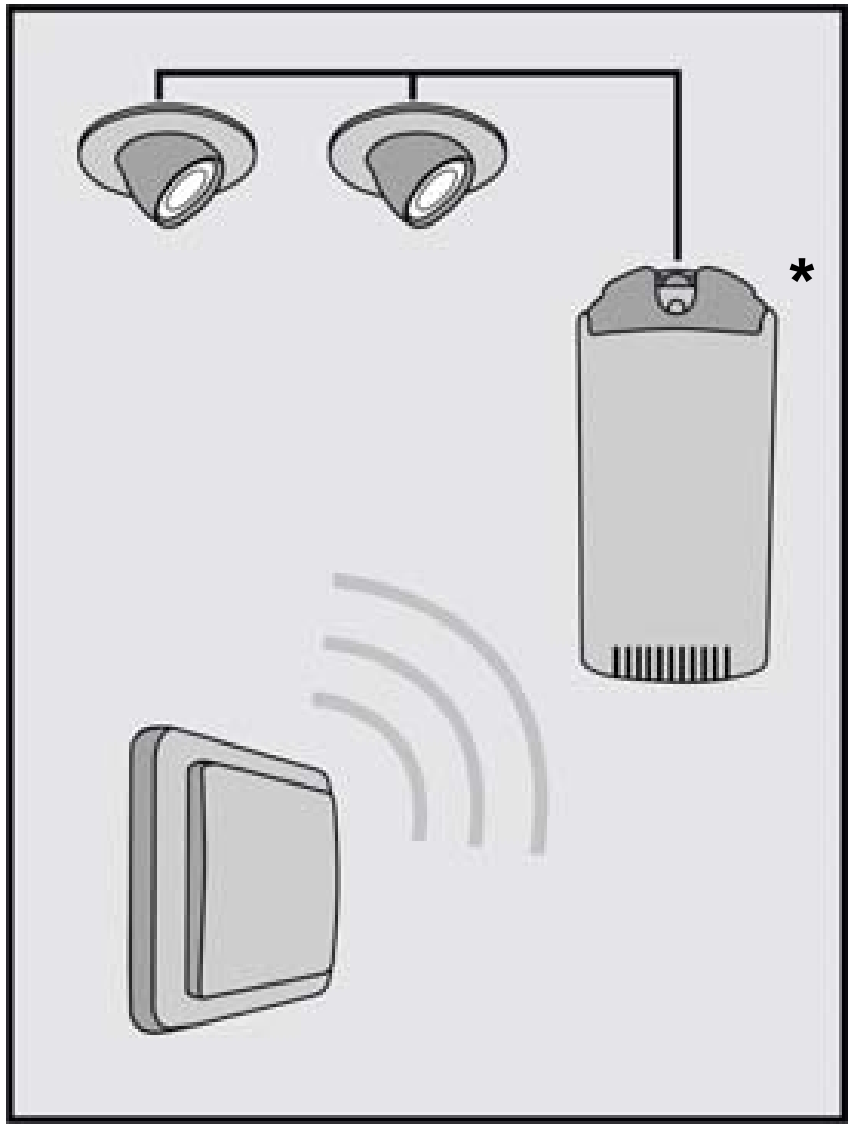

* *Picture of the HDR-105 (not included)*

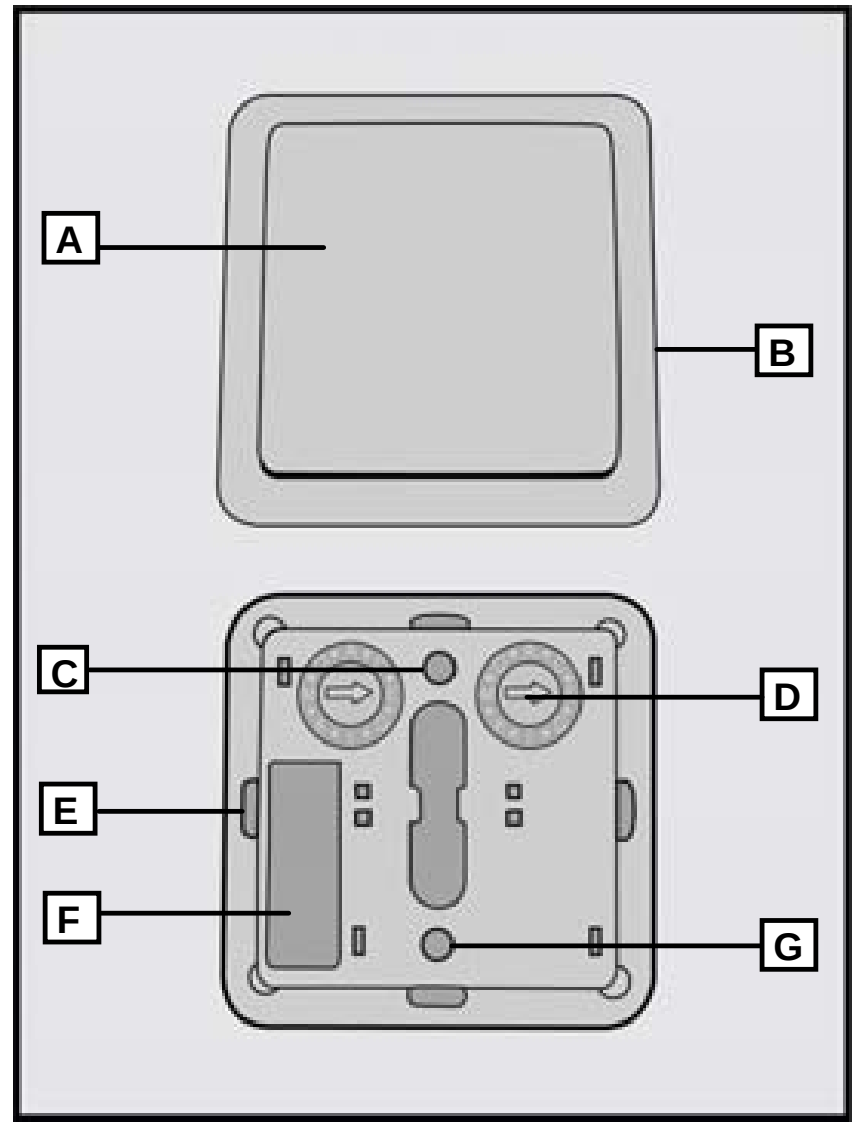

A: Removable button
B: Removable switch plate
C: “Off” button
D: Number/letter code selector
E: Mounting point
F: Battery
G: “On” button

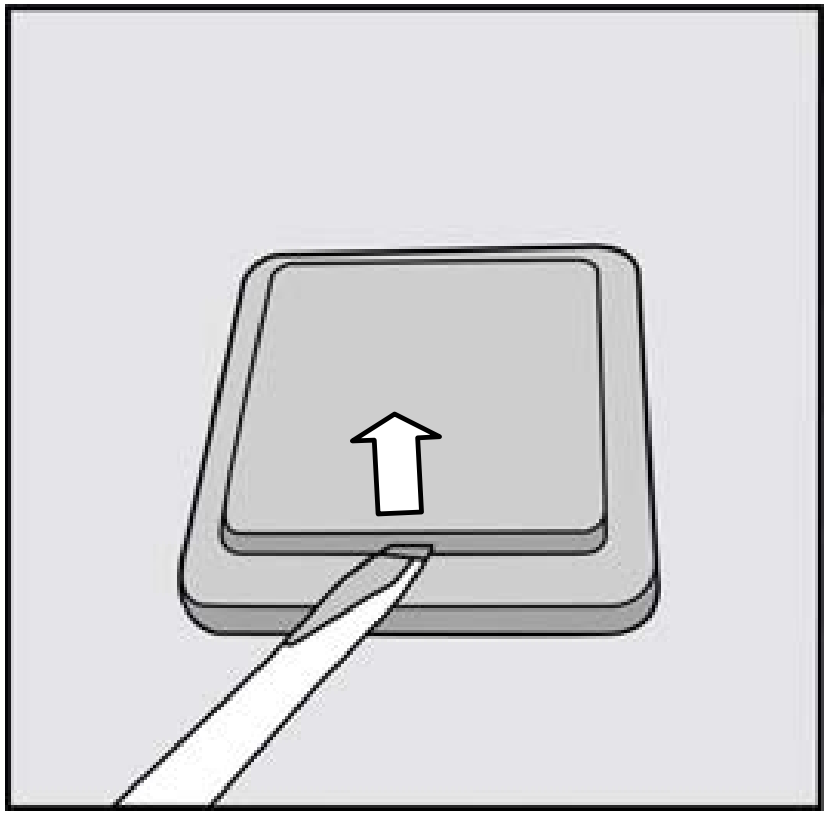

[1] Snap the button off of the base.

⚠ *If necessary, use a screwdriver to carefully pry it off. A recess is provided on the underside of the button for this purpose!*

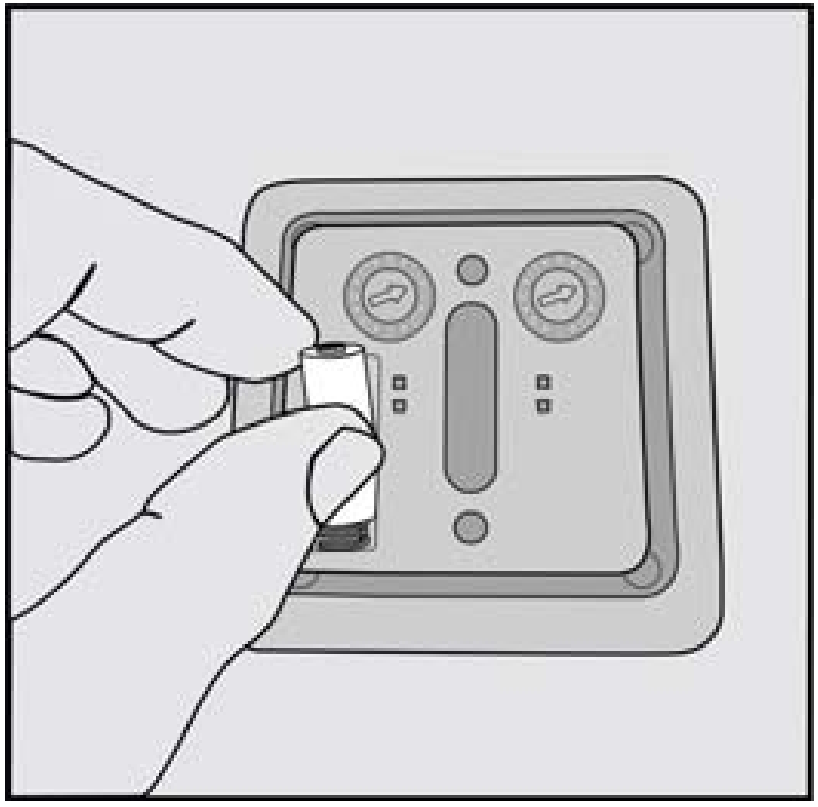

[2] Install battery.

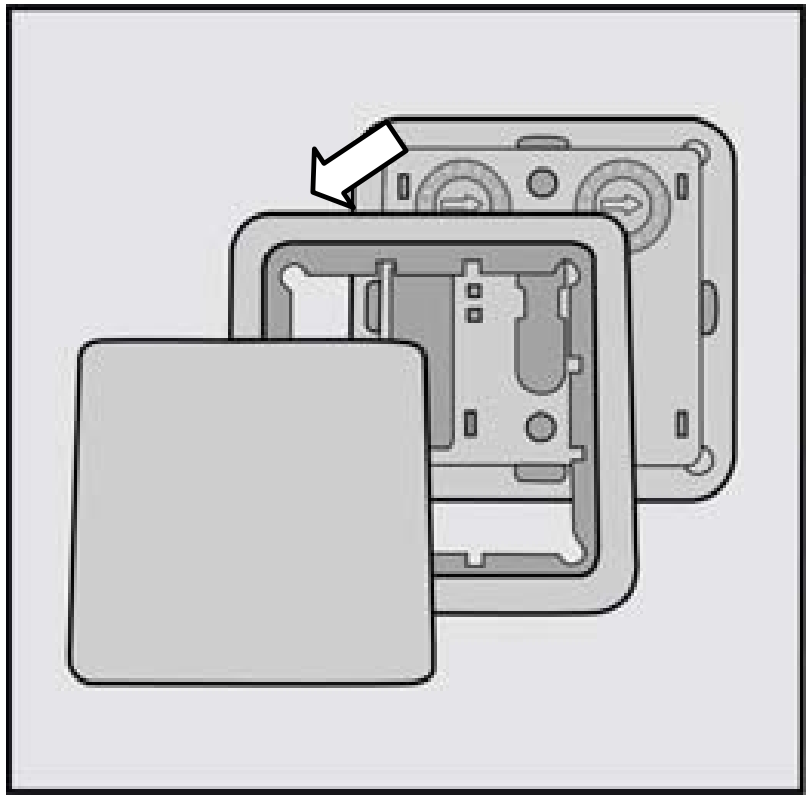

[3] Snap the wall plate off of the base.

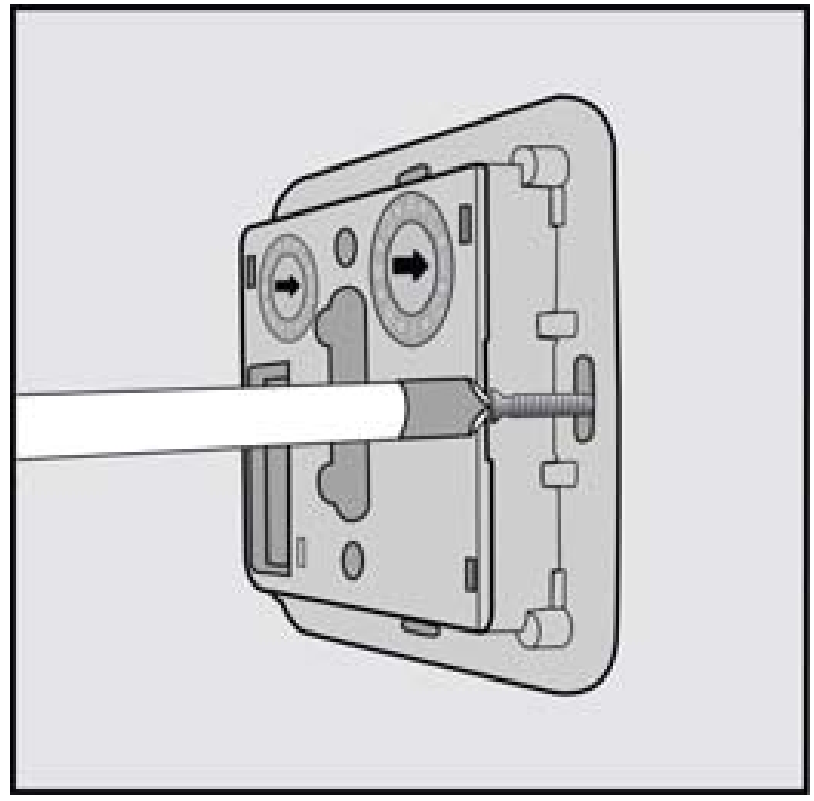

[4] Mount the switch/transmitter at the desired location.

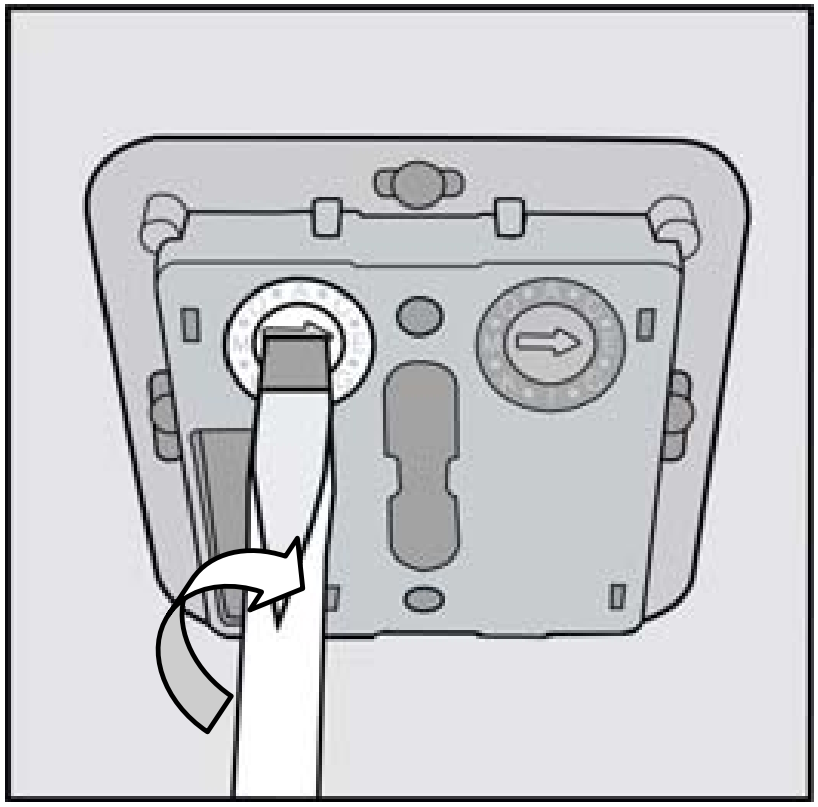

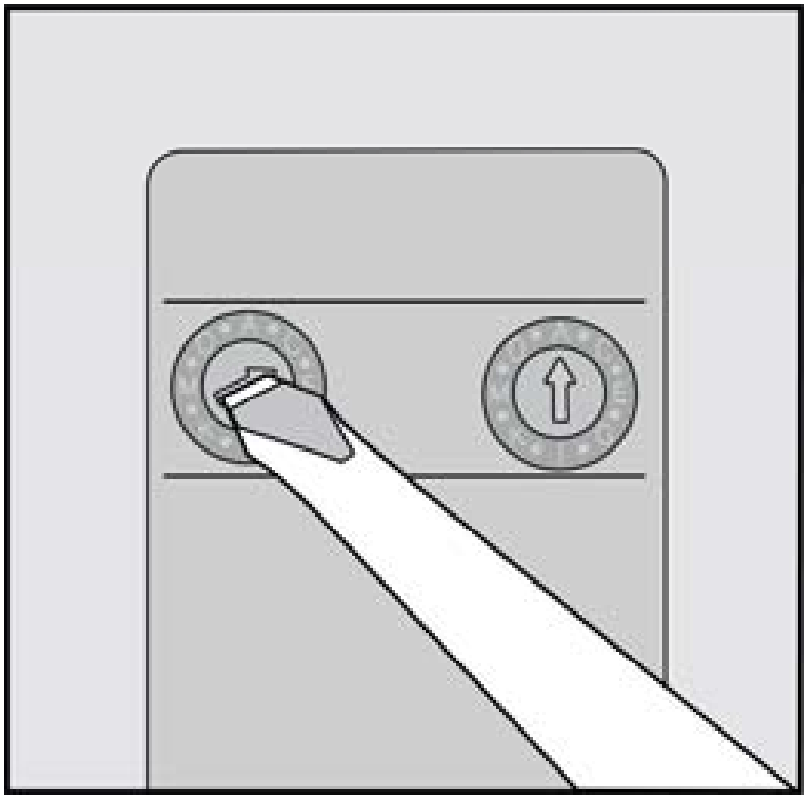

[5] Set the number and letter switches to the desired combination.

⚠ *The letter code (A through P) is the "house code". All the devices can be set to the same letter code!*

⚠ *The numeric code is the device code. Every device can be given its own code (independent operation) or the same code (simultaneous operation)!*

[6] Set the switch/receiver to the same code combination as the transmitter.

⚠ *The figure shows receiver HDR-105!*

⚠ *Some receivers automatically program themselves with the transmitter code. The product code of these receivers always begins with an "A"!*

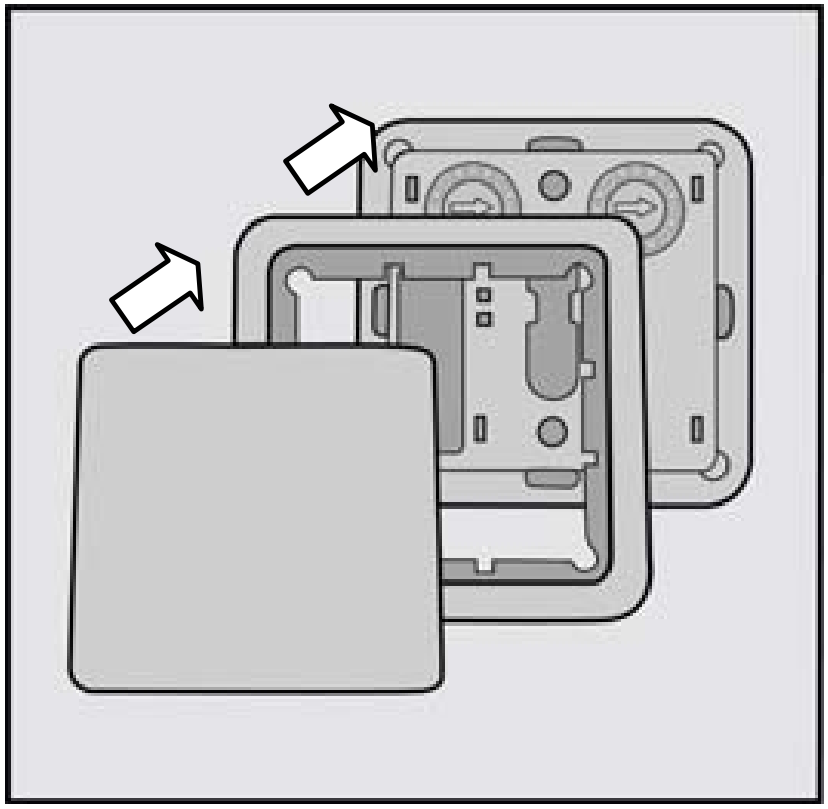

[7] Click the wall plate back onto the base, and then click the button into place.

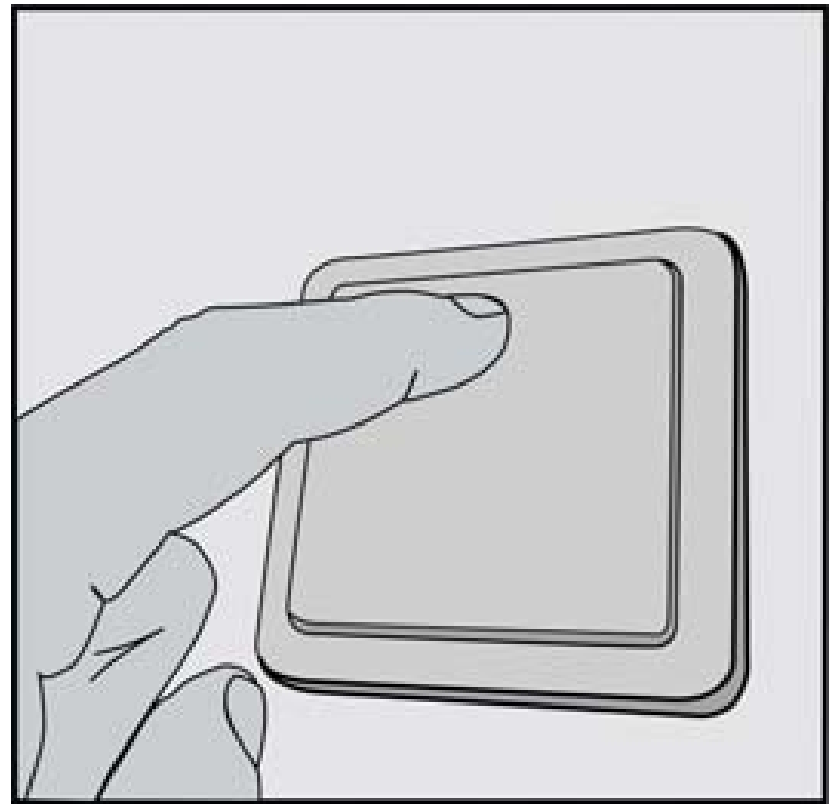

[8] Press “on” (lower edge) or “off” (upper edge) to operate the desired receiver.

Remarks

⚠ Reminders

- This product is a transmitter for operation of one COCO receiver independently or multiple receivers simultaneously.
- This product must be used in combination with at least one COCO receiver (not included).
- The wireless system can be expanded indefinitely with other COCO remote controls and/or receivers.
- This product can be used as a conventional wall switch, but it can also be mounted on virtually any surface and at any location to control a COCO receiver.
- To prevent interference, avoid placing multiple products close to each other. The minimum distance between units should be approx. 50 cm.
- If the product does not work:
  - Check the correct placement and/or function of the battery (replace if necessary).
  - Check step for step whether this product and the receiver are configured properly.
  - Someone else in the area may be using the same house code. Set the system to another house code by repeating **[5 - 6]**.

⚠ Safety instructions

- Never use COCO products for life support systems or other applications in which equipment malfunctions can have life-threatening consequences.
- Do not expose this product to excessive heat, direct sunlight or moisture.
- Remove the battery from this product if it will not be used for an extended period.
- Do not attempt to repair this product. If the product is damaged or if you are in doubt about the proper operation, take the product back to the place of purchase.
- Do not use the product in damp areas. Clean the device with a clean cloth.

⚠ Power

- When some time has passed, if a receiver no longer responds when the product is used, replace the battery.
- Only use a 12 Volt A23 alkaline battery.

- Do not throw the battery into an open fire.
- Respect the local regulations when disposing of batteries.

⚠ Wireless

- This product works using a radio signal that passes through walls, windows and doors. The range is maximum 75 metres in the open air. The range indoors is strongly influenced by local conditions such as concrete, glass and metals. On average, the indoor range is approximately 30 metres.
- New double glass often includes a thin metallic layer. This type of glazing ("**HR glass**") allows most visible light to pass through but has a negative impact on radio signals. If there is HR glass between the transmitter and receiver, you should expect a significant reduction of the range of the wireless signal.
- This product operates at a frequency of 433.92 MHz. It complies with the essential requirements and other conditions of R&TTE Directive 1999/5/EC and can be used in all EU countries.
- There may be restrictions on the use of this device outside the EU. If this device is used outside the EU, check whether the device complies with the local directives.

CE

This product complies with the essential requirements and other relevant provisions of the applicable European directives. The Declaration of Conformity (DoC) is available at www.coco-technology.com.

If possible, submit this product for recycling after use. Do not dispose of the product with household trash.

Warranty and copyright

This device is covered by a 2-year warranty that begins on the day of purchase. Visit www.coco-technology.com/warranty for additional information. Reprinting of (portions of) this manual without permission from Pan-Trade International B.V. is expressly prohibited.

PAN-TRADE INTERNATIONAL B.V.

P.O. BOX 126
4760 AC ZEVENBERGEN
THE NETHERLANDS
www.coco-technology.com

CE

Declaration of Conformity

Pan-Trade International BV declares that the COCO product, model:

type designation	WST-8800 WIRELESS SIMPLEX WALL SWITCH
item number	74011

is in compliance with the essential requirements and other relevant provisions of directives R&TTE 1999/5/EC, EMC 2004/108/EC and LVD 2006/95/EC and is compatible with the standards EN 300 220-1/3, EN 55015, EN 301 489-1/3 and EN 60950.

Manufacturer / Authorised representative,

M.A. Hoekstra, managing director
Zevenbergen, 2008-01-30